


MODULE TYPE B - 36 DOMES

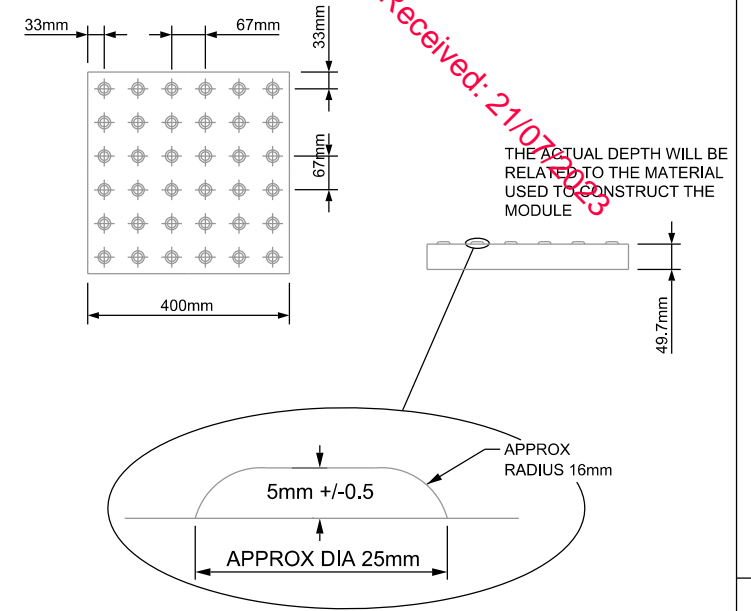

**NOTES:**

1. THE TACTILE DOMES ON THE TILES MUST BE LINED UP TO GIVE THE DIRECTION OF TRAVEL IN ORDER TO CROSS THE CARRIAGEWAY STRAIGHT
2. UTILITY CABINETS/CHAMBERS MUST NOT BE LOCATED WITHIN TACTILE PAVING AREA
3. REFER TO TACTILE PAVING GUIDANCE DOCUMENTATION
4. MODULE TYPE B (400 x 400mm) ONLY IS SHOWN HERE AND SHALL BE USED IN MOST CASES. OTHER SIZE MODULES MAY BE USED WHERE SITE SPECIFIC CIRCUMSTANCES DICTATE.
5. TACTILE BLISTER PAVING SHALL BE BEDDED ON 25mm MOIST SAND / CEMENT MORTAR (3:1), JOINTS FILLED WITH 4:1 MIX WITHIN 2mm OF THE PAVING SURFACE.

**LEGEND:**

 TACTILE PAVIOUR: 400X400 BUFF FINISH (5mm JOINT). TACTILE TO BE LAID SO BLISTER PATTERN IS IN LINE WITH CROSSING.



ACTIVITY



PUBLICATION TITLE

TACTILE AND PAVING DETAILS AND RECOMMENDED GRADIENTS AT UNCONTROLLED PEDESTRIAN CROSSING

STREAM

STANDARD CONSTRUCTION DETAILS (SCD)

HISTORICAL REFERENCE

N/A

DOCUMENTATION SET

STANDARDS

PUBLICATION DATE

JULY 2021

PUBLICATION NUMBER

CC SCD 05136