

Proposed Development of 1 No. Domestic Dwelling House & Associated Works at Knockaloura West, Cortoon, Tuam, Co. Galway

EPA Site Suitability Assessment Report

November 2020



Jennings O'Donovan & Partners Ltd.,

Consulting Engineers, Finisklin Business Park, Sligo. Tel.: 071 916 1416 Fax: 071 916 1080 e mail: info@jodireland.com Web: www.jodireland.com



JENNINGS O'DONOVAN & PARTNERS LIMITED

Project, Civil and Structural Consulting Engineers, FINISKLIN BUSINESS PARK, SLIGO, IRELAND.

(071) 9161416 Telephone Fax (071) 9161080

Email info@jodireland.com Web Site www.jodireland.com



DOCUMENT APPROVAL

PROJECT	Proposed Development of 1 No. Domestic Dwelling House	& Associated Works	
CLIENT / JOB NO	Galway County Council	6140	
DOCUMENT TITLE	Site: Knockaloura West, Cortoon, Tuam, Co. Galway EPA Site Suitability Assessment Report		

Prepared by

Reviewed/Approved by

Document DRAFT	Name PJ Regan	Name Mark Forbes
Date July 2020	Signature Plays	Mark Forts

Prepared by

Reviewed/Approved by

Document FINAL	Name Brian Murphy	Name Mark Forbes
Date 20th Nov 2020	Signature Frim MM	Signature Mark Forts

This document, and information or advice which it contains, is provided by JENNINGS O'DONOVAN & PARTNERS LIMITED solely for internal use and reliance by its Client in performance of JENNINGS O'DONOVAN & PARTNERS LIMITED's duties and liabilities under its contract with the Client. Any advice, opinions, or recommendations within this document should be read and relied upon only in the context of the document as a whole. The advice and opinions in this document are based upon the information made available to JENNINGS O'DONOVAN & PARTNERS LIMITED at the date of this document. Following final delivery of this document to the Client, JENNINGS O'DONOVAN & PARTNERS LIMITED will have no further obligations or duty to advise the Client on any matters, including development affecting the information or advice provided in this document. This document has been prepared by JENNINGS O'DONOVAN & PARTNERS LIMITED in their professional capacity as Consulting Engineers. The contents of the document does not, in any way, purport to include any manner of legal advice or opinion. This document is prepared in accordance with the terms and conditions of JENNINGS O'DONOVAN & PARTNERS LIMITED contract with the Client. Regard should be had to those terms and conditions when considering and/or placing any reliance in this document. The plant is prepared in accordance with the Client wish to release this document to a Third Party's reliance. JENNINGS O'DONOVAN & PARTNERS LIMITED may, at its discretion, agree on this document. Should the Client wish to release this document to a Third Party for that party's reliance, JENNINGS O'DONOVAN & PARTNERS LIMITED may, at its discretion, agree to such release provided that:

JENNINGS O'DONOVAN & PARTNERS LIMITED written agreement is obtained prior to such release, and

By release of the document to the Third Party, that Third Party does not acquire any rights, contractual or otherwise, whatsoever against JENNINGS O'DONOVAN &
PARTNERS LIMITED and JENNINGS O'DONOVAN & PARTNERS LIMITED, accordingly, assume no duties, liabilities or obligations to that Third Party, and
JENNINGS O'DONOVAN & PARTNERS LIMITED accepts no responsibility for any loss or damage incurred by the Client or for any conflict of JENNINGS O'DONOVAN & (a) (b)

(c) PARTNERS LIMITED's interests arising out of the Client's release of this document to the Third Party

Directors: D. Kiely, C. McCarthy Senior Associates: R. Davis, S. Gilmartin, J. Healy, J. McElvaney, T. McGloin Regional Director: A. Phelan Associates: L. Brennan, S. Lee, S. Martyn, L. McCormack, S. Molloy

Consultants: C. Birney, M. Gavin, R. Gillan Company Reg No. 149104 VAT Reg. No. IE6546504D



6140/510/PJR

TABLE OF CONTENTS

1.	INTRODUCTION
	SITE CHARACTERISATION FORM
	PENDICES pendix A – Site Suitability Assessment - Supporting Maps
Ар	pendix B - Site Suitability Assessment - Supporting Photographs
Ар	pendix C - Site Suitability Assessment - Supporting Drawings
Ар	pendix D - Site Suitability Assessment – Supporting Document relating to Proposed Effluent Treatment System

1. INTRODUCTION

Jennings O'Donovan & Partners Limited (JOD) have been appointed by Galway County Council to carry out Site Suitability Assessment on several single rural dwelling sites at various locations in County Galway.

This report relates to Site at Knockaloura West, Cortoon, Tuam, Co. Galway.

2. SITE CHARACTERISATION FORM

Please see overleaf completed Site Characterisation Form for Knockaloura West, Cortoon, Tuam, Co. Galway in accordance with the EPA Code of Practice for Wastewater Treatment and Disposal Systems Serving Single Houses (p.e,<10).

APPENDIX B: SITE CHARACTERISATION FORM

File Reference: 6140 Site No. 2
1.0 GENERAL DETAILS (From planning application)
Prefix: First Name: GALWAY COUNTY COUNCIL Surname:
Address: Site Location and Townland:
KNOCKALOURA WEST, CO. GALWAY. KNOCKALOURA WEST, CO. GALWAY.
Telephone No: N/A Fax No: N/A
E-Mail: N/A
Maximum no. of Residents: 6 No. of Double Bedrooms: 2 No. of Single Bedrooms: 0
Proposed Water Supply: Mains 🗸 Private Well/Borehole Group Well/Borehole
2.0 GENERAL DETAILS (From planning application)
Soil Type, (Specify Type): BminDW
Aquifer Category: Regionally Important Rk Locally Important Poor
Vulnerability: Extreme High Moderate Low Unknown Unknown
Bedrock Type: CDBURR - Burren Formation
Name of Public/Group Scheme Water Supply within 1 km: PUBLIC MAINS
Groundwater Protection Scheme (Y/N): Yes Source Protection Area: SI SO
Groundwater Protection Response: R1
Presence of Significant Sites (Archaeological, Natural & Historical): SAC - 000263 Drumbulcaun bog,1.8k northeast Monument - SMR No. GA030-086 holy/saint's stone 148m northwest
Past experience in the area:
Comments:
(Integrate the information above in order to comment on: the potential suitability of the site, potential targets at risk, and/or any potential site restrictions).
SITE SUITABILITY:- R1 ACCEPTABLE SUBJECT TO NORMAL GOOD PRACTICE,
POTENTIAL TARGETS AT RISK:- SURFACE WATER, GROUND WATER

Note: Only information available at the desk study stage should be used in this section.

3.0 ON-SITE ASSESSMENT

3.1 Visual Assessment

Landscape Position: UNDULATING, FLAT, SHOULDER									
Slope: Steep (>1:5) Shallow (1:5-1:20) Relatively Flat (<1:20)									
Surface Features within a minimum of 250m (Distance To Features Should Be Noted In Metres)									
Houses: 1 No. DWELLING HOUSES WITHIN 250M OF SITE									
Existing Land Use: DOMESTIC WITH ADJOINING AGRICULTURAL LAND									
Vegetation Indicators: GRASS/SCRUB									
Groundwater Flow Direction: FROM NORTHEAST TO SOUTHWEST ACROSS THE SITE									
Ground Condition: RELATIVELY DRY UNDERFOOT									
Site Boundaries: ROADWAY / BLOCK WALL / HEDGROW									
Roads: PUBLIC ROAD TO EAST									
Outcrops (Bedrock And/Or Subsoil): NO OUTCROPS NOTED WITHIN 250M									
Surface Water Ponding: NONE ENCOUNTERED Lakes: NONE WITHIN 500M									
Beaches/Shellfish: NONE Areas/Wetlands: NONE ENCOUNTERED									
Karst Features: NONE ENCOUNTERED WITHIN 250M									
Watercourse/Stream*: NONE WITHIN 250M									
Drainage Ditches*: NONE ENCOUNTERED WITHIN 250M									
Springs / Wells*: NONE ENCOUNTERED WITHIN 250M									
Comments: (Integrate the information above in order to comment on: the potential suitability of the site, potential targets at risk, the suitability of the site to treat the wastewater and the location of the proposed system within the site).									
POTENTIAL TARGETS AT RISK:-									
GROUND WATER									
SITE APPEARS SUITABLE FOR A WASTEWATER TREATMENT AND DISPOSAL SYSTEM PROVIDING FAVOURABLE 'T' / 'P' IS ACHIEAVABLE.									
THERE ARE NO SITE RESTRICTIONS, RELATIVELY LARGE SITE/LANDHOLDING.									

^{*}Note and record water level

3.2 Trial Hole (should be a minimum of 2.1m deep (3m for regionally important aquifers))

To avoid any accidental damage, a trial hole assessment or percolation tests should not be undertaken in areas, which are at or adjacent to significant sites (e.g. NHAs, SACs, SPAs, and/or Archaeological etc.), without prior advice from National Parks and Wildlife Service or the Heritage Service.

Depth of trial hole (m): 1.50										
	Depth from ground surface to bedrock (m) (if present): Depth from ground surface to water table (m) (if present):									
Depth	of wate	r ingress:	Rock typ	e (if present): LII	MESTONE					
Date a	and time	of excavation: 02	/07/2020 09:2	Date a	nd time of examina	tion: 04/07/202	0 18:04			
	Depth of P/T Test*	Soil/Subsoil Texture & Classification**	Plasticity and dilatancy***	Soil Structure	Density/ Compactness	Colour****	Preferential flowpaths			
0.1 m 0.2 m		medium bedded sandy SILT/CLAY	DILATANCY WITH DIFFICULTY	CRUMB	SOFT	MEDIUM BROWN	GRASSS ROOTS TO -0.2M B.G.L.			
0.3 m 0.4 m 0.5 m	P1,2,3	medium bedded clayey,silty, gravelly, SAND, medium spaced cobbles	DILATANCY WITH DIFFICULTY	ANGULAR	FIRM	SANDY BROWN	Preferential flow paths:- GRAVELS			
0.6 m 0.7 m 0.8 m 0.9 m 1.0 m	T 1,2,3	thickly bedded clayey,silty, gravelly, SAND, medium spaced cobbles and widely spaced boulders	DILATANCY WITH DIFFICULTY	ANGULAR	STIFF	SANDY BROWN	Preferential flow paths:- GRAVELS, COBLES			
1.1 m 1.2 m 1.3 m 1.4 m		TRIAL HOLE	TIAL HOLE	TRIAL HOLE	TRIAL HOLE	TRIAL HOLE	TRIAL HOLE			
1.5 m		TO 1.5M B.G.LEVEL	TO 1.5M B.G.L	1.5m B.G.L	TO 1.5m B.G.L	1.5m B.G.L	TO 1.5m B.G.L			
1.6 m		TO 1.5M B.G.LEVEL	10 1.5M B.G.L	1.5III B.G.L	TO T.SIII B.G.L	1.5III B.G.L	TO 1.5III B.G.L			
1.7 m 1.8 m										
1.9 m										
2.0 m										
2.1 m 2.2 m										
2.2 III										
2.4 m										
2.4 III										
2.6 m										
2.7 m										
2.8 m										
2.9 m										
3.0 m										

Likely T value: 20.00 Note: *Depth of percolation test holes should be indicated on log above. (Enter P or T at depts as appropriate).

** See Appendix E for BS 5930 classification.

 $^{^{\}star\star\star}$ 3 samples to be tested for each horizon and results should be entered above for each horizon.

^{****} All signs of mottling should be recorded.

3.2 Trial Hole (contd.) Evaluation:


The Trial pit shows a 0.2m upper layer of sandy SILT/CLAY Topsoil, with a 0.5m layer of clayey, silty, gravelly, SAND directly under the topsoil and a thickly bedded clayey, silty, gravelly, SAND to the base of the trial pit. there were medium spaced cobbles and widely spaced boulders noted within the subsoil layers.

The soil and subsoil layers are likely to produce favorable percolation rates for the 'P' & 'T' tests.

The trial pit was excavated to a depth of 1.5m below ground. There was no Water ingress and there was no water table recorded. There were significant boulders noted to the base of the trial pit at time of excavation.

3.3(a) Percolation ("T") Test for Deep Subsoils and/or Water Table

Step 1: Test Hole Preparation

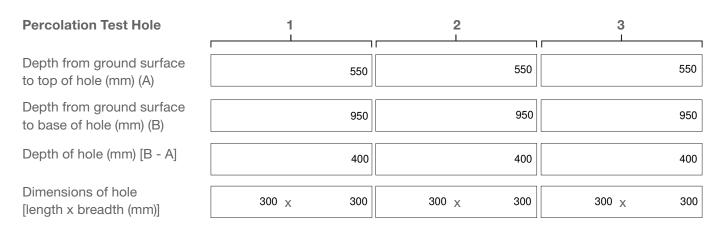

Step 2: Pre-Soaking Test Holes

Date and Time						
pre-soaking started	02/07/2020	08:57	02/07/2020	08:59	02/07/2020	09:03

Each hole should be pre-soaked twice before the test is carried out. Each hole should be empty before refilling.

Step 3: Measuring T₁₀₀

Percolation Test Hole No.	1	2	3
Date of test	03/07/2020	03/07/2020	03/07/2020
Time filled to 400 mm	13:14	13:12	13:11
Time water level at 300 mm	13:30	13:24	13:55
Time to drop 100 mm (T ₁₀₀)	16.00	12.00	44.00
Average T ₁₀₀			24.00

If $T_{100} > 300$ minutes then T-value >90 – site unsuitable for discharge to ground

If $T_{100} \le 210$ minutes then go to Step 4;

If $T_{100} > 210$ minutes then go to Step 5;

Step 4: Standard Method (where $T_{100} \le 210$ minutes)

Percolation Test Hole		1			2			3	
Fill no.	Start Time	Finish Time	Δt (min)	Start Time	Finish Time	∆t (min)	Start Time	Finish Time	∆t (min)
	(at 300 mm)	(at 200 mm)		(at 300 mm)	(at 200 mm)		(at 300 mm)	(at 200 mm)	
1	13:30	14:36	66.00	13:24	13:55	31.00	13:55	15:08	73.00
2	14:36	14:43	7.00	13:55	14:43	48.00	15:08	16:52	104.00
3	14:43	15:20	37.00	14:43	15:16	33.00	16:52	19:18	146.00
Average ∆t Value			36.67			37.33			107.67
	Average ∆t. [Hole No.1]		9.17 (t ₁)	Average ∆t [Hole No.2]		9.33 (t ₂)	Average ∆t		26.92 (t ₃)
Result of Test: T = 15.14 (min/25 mm)									

Comments:

THE RESULT OF THE 'T' TEST CARRIED OUT ON SITE INDICATE THAT THE SITE IS SUITABLE FOR A SEPTIC TANK SYSTEM OR A SECONDARY TREATMENT SYSTEM DISCHARGING TO GROUNDWATER.


Step 5: Modified Method (where $T_{100} > 210$ minutes)

Percolation Test Hole No.	1			2			3					
Fall of water in hole (mm)	Time Factor = T _f	Time of fall (mins) = T _m	K _{fs} = T _f / T _m	T – Value = 4.45 / K _{fs}	Time Factor = T _f	Time of fall (mins) = T _m	K _{fs} = T _f / T _m	T – Value = 4.45 / K _{fs}	Time Factor = T _f	Time of fall (mins) = T _m	K _{fs} = T _f / T _m	T – Value = 4.45 / K _{fs}
300 - 250	8.1				8.1				8.1			
250 - 200	9.7				9.7				9.7			
200 - 150	11.9				11.9				11.9			
150 - 100	14.1				14.1				14.1			
Average T- Value	T- Value	e Hole 1=	= (t ₁)	0.00	T- Value	Hole 1=	(t ₂)	0.00	T- Value	Hole 1=	= (t ₃)	0.00

Result of Test: T =	0.00 (min/25 mm)		
Comments:			

3.3(b) Percolation ("P") Test for Shallow Soil / Subsoils and/or Water Table

Step 1: Test Hole Preparation

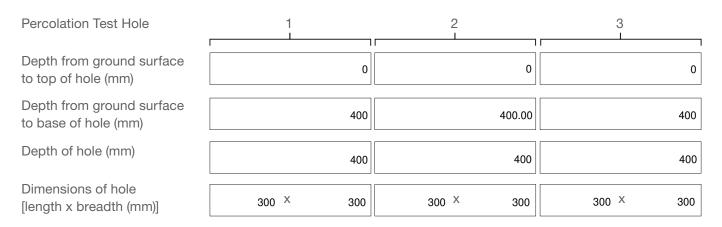

Step 2: Pre-Soaking Test Holes

Date and Time						
pre-soaking started	02/07/2020	09:08	02/07/2020	09:10	02/07/2020	09:16

Each hole should be pre-soaked twice before the test is carried out. Each hole should be empty before refilling.

Step 3: Measuring P₁₀₀

Percolation Test Hole No.	1	2	3
Date of test	03/07/2020	03/07/2020	03/07/2020
Time filled to 400 mm	13:13	13:11	13:13
Time water level at 300 mm	13:22	13:15	13:20
Time to drop 100 mm (P ₁₀₀)	9.00	4.00	7.00
Average P ₁₀₀			6.67

If $P_{_{100}} > 300$ minutes then P-value >90 – site unsuitable for discharge to ground

If $P_{100} \le 210$ minutes then go to Step 4;

If $P_{100} > 210$ minutes then go to Step 5;

Step 4: Standard Method (where $P_{100} \le 210$ minutes)

Percolation Test Hole		1			2			3	
Fill no.	Start Time (at 300 mm)	Finish Time (at 200 mm)	Δp (min)	Start Time (at 300 mm)	Finish Time (at 200 mm)	Δp (min)	Start Time (at 300 mm)	Finish Time (at 200 mm)	Δp (min)
1	13:22	13:48	26.00	13:15	13:26	11.00	13:20	13:34	14.00
2	13:48	14:16	28.00	13:26	13:37	11.00	13:34	13:49	15.00
3	14:16	14:49	33.00	13:37	13:50	13.00	13:49	14:08	19.00
Average ∆p Value			29.00			11.67			16.00
	Average Δp [Hole No.1]		7.25 (p ₁)	Average Δp [Hole No.2]		2.92 (p ₂)	Average Δ [Hole No.3		4.00 (p ₃)
Result of Test: P = 4.72 (min/25 mm)									

Comments:

THE RESULT OF THE 'P' TEST CARRIED OUT ON SITE INDICATE THE UPPER SOIL LAYER IS SUITABLE FOR A SECONDARY TREATMENT SYSTEM WITH POLISHING FILTER AT GROUND SURFACE OR OVERGROUND.

Step 5: Modified Method (where $P_{100} > 210$ minutes)

Percolation Test Hole No.		1				2				3		
Fall of water in hole (mm)	Time Factor = T _f	Time of fall (mins) = T _m	K _{fs} = T _f / T _m	P – Value = 4.45 / K _{fs}	Time Factor = T _f	Time of fall (mins) = T _m	K _{fs} = T _f / T _m	P – Value = 4.45 / K _{fs}	Time Factor = T _f	Time of fall (mins) = T _m	K _{fs} = T _f / T _m	P – Value = 4.45 / K _{fs}
300 - 250	8.1				8.1				8.1			
250 - 200	9.7				9.7				9.7			
200 - 150	11.9				11.9				11.9			
150 - 100	14.1				14.1				14.1			
Average P- Value	P- Value	e Hole 1:	= (p ₁)	0.00	P- Value	Hole 1=	(p ₂)	0.00	P- Value	Hole 1	= (p ₃)	0.00

Result of Test: P =	0.00	(min/25 mm)
Comments:		

3.4 The following associated Maps, Drawings and Photographs should be appended to this site characterisation form.

- 1. Discovery Series 1:50,000 Map indicating overall drainage, groundwater flow direction and housing density in the area.
- 2. Supporting maps for vulnerability, aquifer classification, soil, bedrock.
- 3. North point should always be included.
- 4. (a) Sketch of site showing measurements to Trial Hole location and
 - (b) Percolation Test Hole locations,
 - (c) wells and
 - (d) direction of groundwater flow (if known),
 - (e) proposed house (incl. distances from boundaries)
 - (f) adjacent houses,
 - (g) watercourses,
 - (h) significant sites
 - (i) and other relevant features.
- 5. Cross sectional drawing of the site and the proposed layout¹ should be submitted.
- 6. Photographs of the trial hole, test holes and site (date and time referenced).

¹ The calculated percolation area or polishing filter area should be set out accurately on the site layout drawing in accordance with the code of practice's requirements.

4.0 CONCLUSION of SITE CHARACTERISATION

Integrate the information from the desk study and on-site assessment (i.e. visual assessment, trial hole and percolation tests) above and conclude the type of system(s) that is (are) appropriate. This information is also used to choose the optimum final disposal route of the treated wastewater.

Not Suitable for Development								
Suitable for ¹ 1. Septic tank system (septic tank and percolation area) Yes	Discharge Route Discharge to Ground Water							
2. Secondary Treatment System								
a. septic tank and filter system constructed on-site and polishing filter; or								
b. packaged wastewater treatment system and polishing filter Yes								
5.0 RECOMMENDATION								
Propose to install: Packaged wastewater treatment system and polishing filter								
and discharge to: Ground Water								
Trench Invert level (m): -0.30								
Site Specific Conditions (e.g. special works, site improvement works testing e	tc.							
DUE TO SITE RESTRICTIONS REGARDING SEPERATION DISTANCE REQUIRMENTS, IT IS SECONDARY EFFLUENT TREATMENT SYSTEM FOLLOWED BY A POLISHING FILTER AT/A INVERT AT -0.3M BELOW GROUND LEVEL (AS PER SITE LAYOUT PLAN & SECTION A-A TH number 6140-JOD-XX-ZZ-DR-B-2012 & 2013 (A3 @ 1:500, 1:100)	BOVE GROUND LEVEL - TRENCH							
SECONDARY TREATMENT SYSTEM:-								
THE PACKAGED WASTEWATER TREATMENT SYSTEM SHALL BE IN ACCORDANCE THE F CODE OF PRACTICE - WASTEWATER TREATMENT AND DISPOSAL SYSTEMS SERVING S CERTIFIED IN ACCORDANCE WITH SR66 & EN12566-3.								
RAISED POSISHING FILTER:-								
THE POLISHING FILTER SHALL BE INSTALLED AS PER SITE LAYOUT PLAN, SECTION A-A number 6140-JOD-XX-ZZ-DR-B-2012 P.01 & 2015 P.01 (A3 @ 1:500, 1:100) i.e. INSTALLA DIS 110mm uPVC PIPEWORK AT GROUND LEVEL, LAID AT A 1:200 GRADIENT, WITH 8mm PER AT 75mm CENTRES, PIPE WORK TO BE LAID 2.5M CENTER TO CENTER WITHIN A 500mm WASHED GRAVEL AND 150MM WASHED GRAVEL OVER PIPEWORK WITH GEOTEXTILE M DEEP TOPSOIL COVER OVER GEOTEXTILE.	TRUBTION BOX WITH 4 No. 9m RUNS OF FORATIONS (TYPICALLY AT 4,6,8 o'clock) WIDE TRENCH ON 300MM DEEP 8-32mm							

¹ note: more than one option may be suitable for a site and this should be recorded

² A discharge of sewage effluent to "waters" (definition includes any or any part of any river, stream, lake, canal, reservoir, aquifer, pond, watercourse or other inland waters, whether natural or artificial) will require a licence under the Water Pollution Acts 1977-90. Refer to Section 2.6.2.

6.0 TREATMENT SYSTEM DETAILS

SYSTEM TYPE: Seption	c Tank Syste	∤M							
Tank Capacity (m³)		Percolation Area			Mou	nded Per	colation A	rea	
		No. of Trenches			No. o	of Trench	es		
		Length of Trenche	es (m	n)	Leng	th of Trei	nches (m)		
		Invert Level (m)			Inver	t Level (n	n)		
SYSTEM TYPE: Secon	ndary Treatm	nent System							
Filter Systems						Packa	ge Treatı	nent	Systems
Media Type	Area (m²)*	Depth of F	ilter	Invert Level		Туре			
Sand/Soil						SOLIDO	SMART - S	3.B.R.	
Soil						Capaci	ty PE [6.00
Constructed Wetland						Sizing	of Primary	y Cor	mpartment
Other							3.00	m³	
SYSTEM TYPE: Tertia	ry Treatmen	t System							
Polishing Filter: Surfa	ce Area (m²)	67.50	Pa	ckage Treatmen	nt Sys	tem: Ca	pacity (pe	;)	
or Gravity Fed:			Co	onstructed Wetla	nd: S	urface A	rea (m²)*		
No. of Trenches		4							
Length of Trenches (m)		9.00							
Invert Level (m)		-0.30							
DISCHARGE ROUTE:									
Groundwater v	Hydra	nulic Loading Rate	* (l/n	n².d)					
Surface Water **	Disch	arge Rate (m³/hr)							
TREATMENT STANDA	ARDS:								
Treatment System Perf	ormance St	andard (mg/l) B	SOD	SS	NH	₁ - N	Total N	Т	Total P
EN 12566-3				5.00 13.00	o 🔃	0.70	5.	.00	2.00
QUALITY ASSURANCE	E:								
Installation & Commiss	Installation & Commissioning On-going Maintenance								
THE PACKAGED SYSTEM AND POLISHING FILTER SHALL BE INSTALLED IN ACCORDANCE THE REQUIREMENTS OUTLINED IN THE EPA CODE OF PRACTICE - WASTEWATER TREATMENT AND DISPOSAL SYSTEMS SERVING SINGLE HOUSES 2009. DE-SLUDGING SHALL BE CARRIED OUT A MINIMUM OF PER YEAR AND IN ACCORDANCE THE REQUIREMENT OUTLINED IN THE EPA CODE OF PRACTICE - WASTEWATER TREATMENT AND DISPOSAL SYSTEMS SERVING SIN HOUSES 2009.				NTS EWATER					

^{*} Hydraulic loading rate is determined by the percolation rate of subsoil

^{**} Water Pollution Act discharge licence required


7.0 SITE ASSESSOR DETAILS


Company:	JENNINGS O'DONOVAN 8	PARTNERS							
Prefix:	Mr. First Name:	PJ	Surname:	REGAN					
Address:	FINISKLIN, SLIGO, CO. SL	IGO.							
Qualificati	Qualifications/Experience: B. Sc. (Bld. Surv), FETAC Site Suitability Assessment								
Date of Re	eport: 23/07/2020								
Phone: 0	71 9161416	Fax:	e-mail	pjregan@jodireland.com					
Indemnity	Insurance Number:								
Signature:	My Day	'n							

APPENDIX A


SITE SUITABILITY ASSESSMENT SUPPORTING MAPS

- Soil Classification Map
- Aquifer Classification Map
 - Vulnerability Map
 - Bedrock Map
 - Karst Map
 - Wells & Springs Map
- National Parks & Wildlife Map
 - National Monuments Map

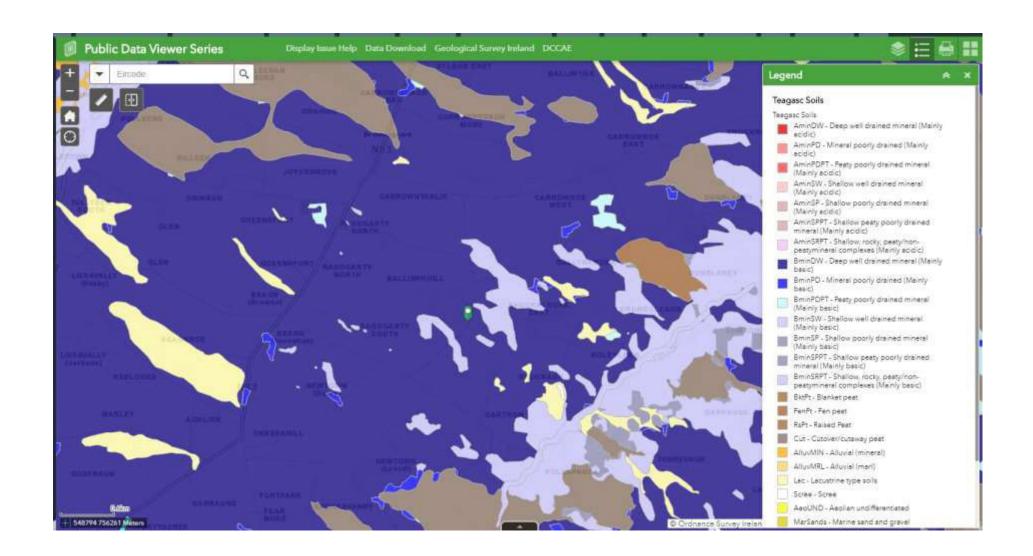


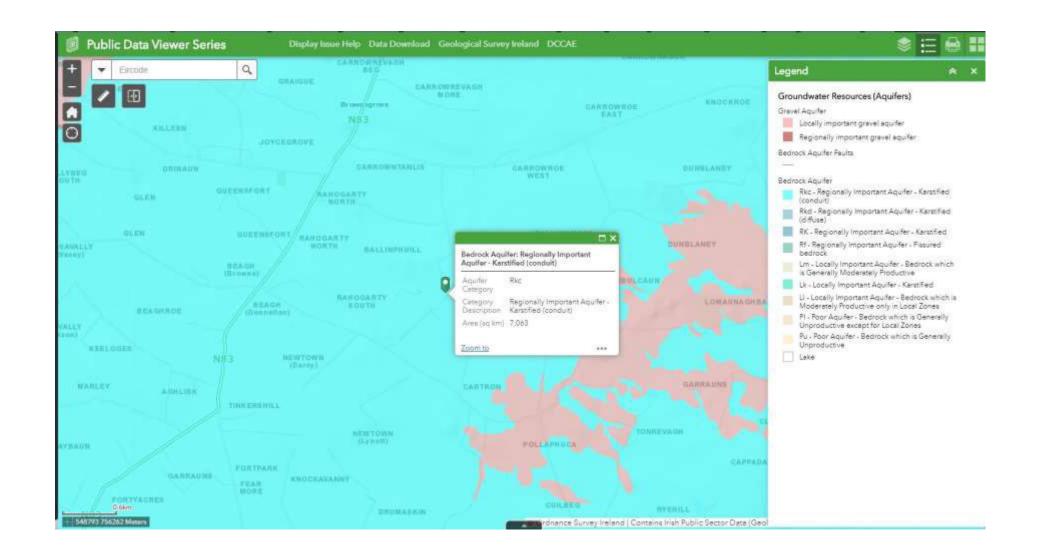


2

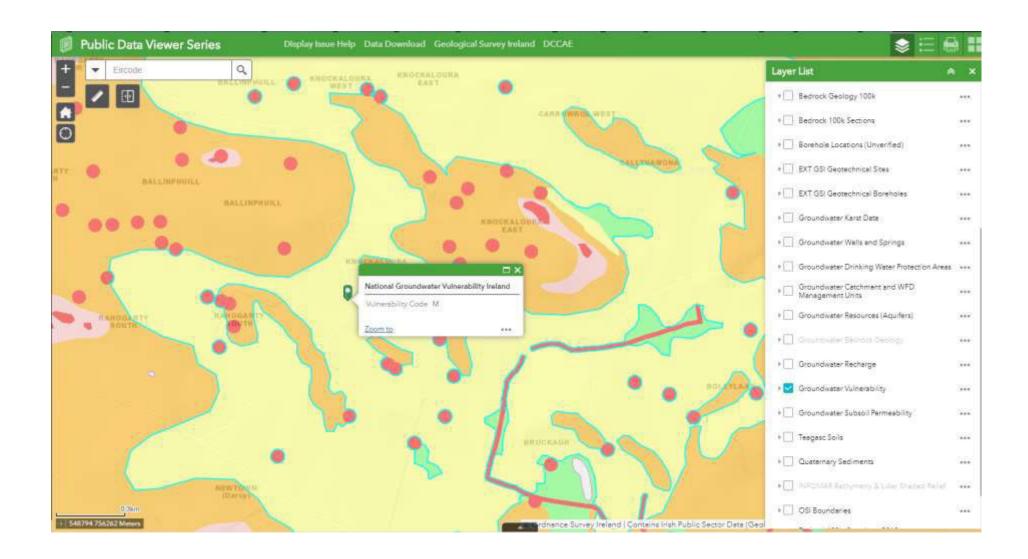


3

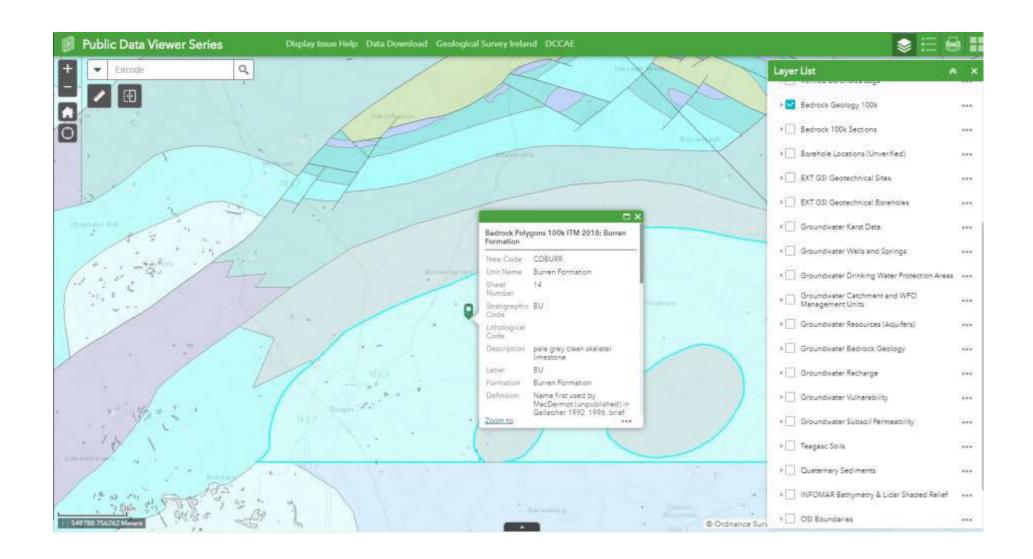


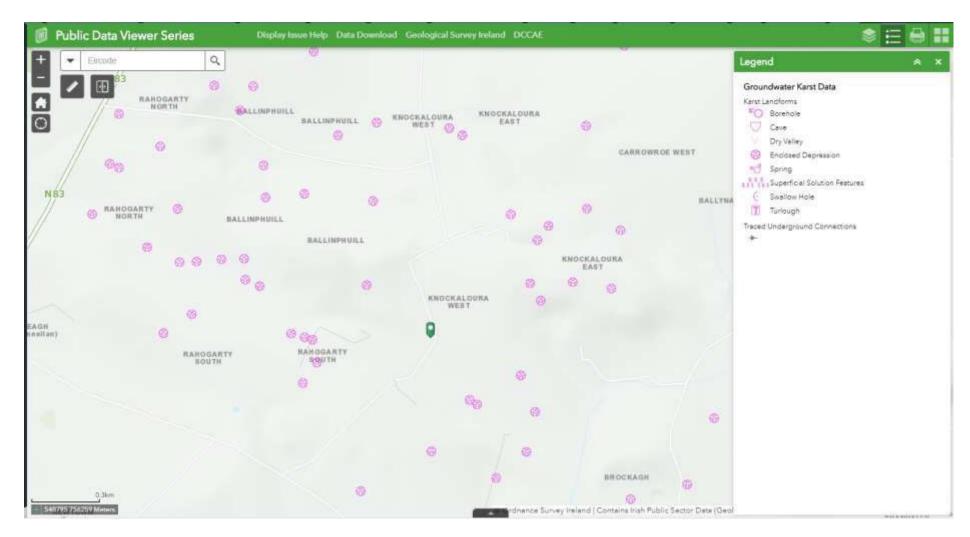


Karst Features Map

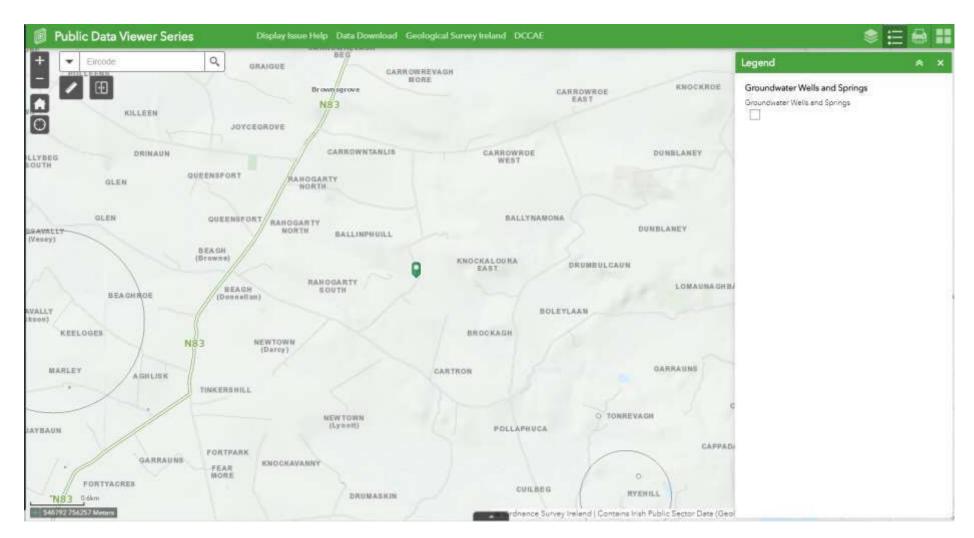

Wells & Springs Map

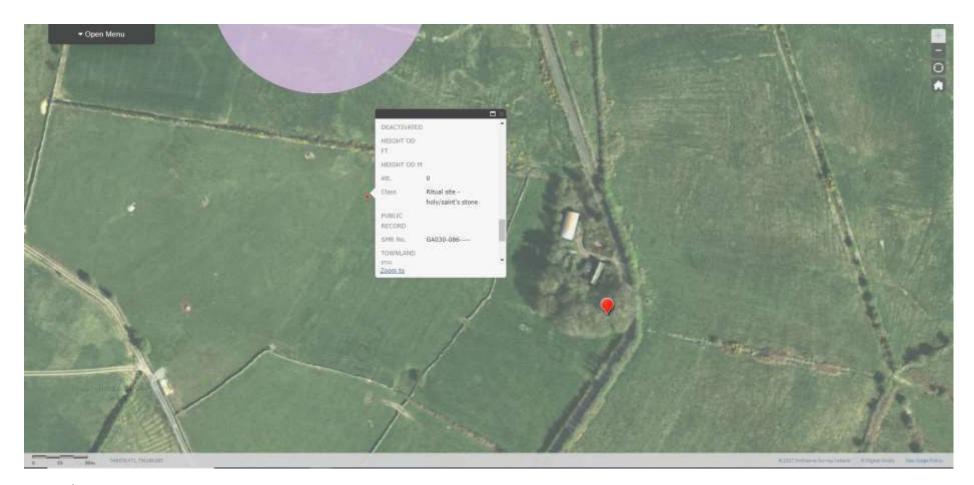

National Monuments Map

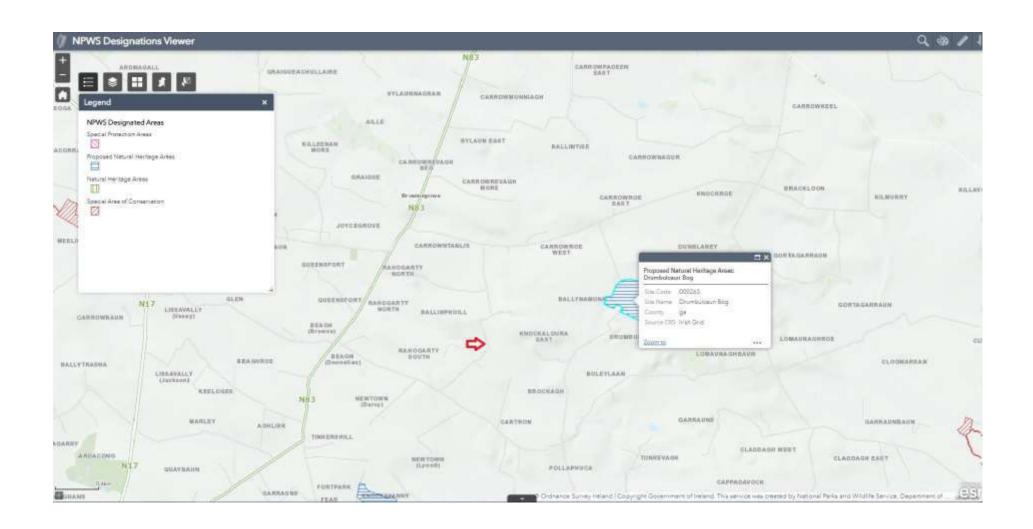

APPENDIX B

SITE SUITABILITY ASSESSMENT SUPPORTING PHOTOGRAPHS

- Overview of site
 - Trial Hole
 - P Tests
 - T Tests



Overview of percolation text area, showing Trial Pit, T & P text holes.



Trial Pit dug to 1.5m deep 02-07-2020, water ingress noted at base of Trial Hole.



Trial Pit dug to 1.5m deep 02-07-2020, water ingress noted at base of Trial Hole.




Trial Pit spoil dug to 1.5m deep 02-07-2020.



P1 dug to 400mm 02-07-2020




P1 dug to 400mm 02-07-2020

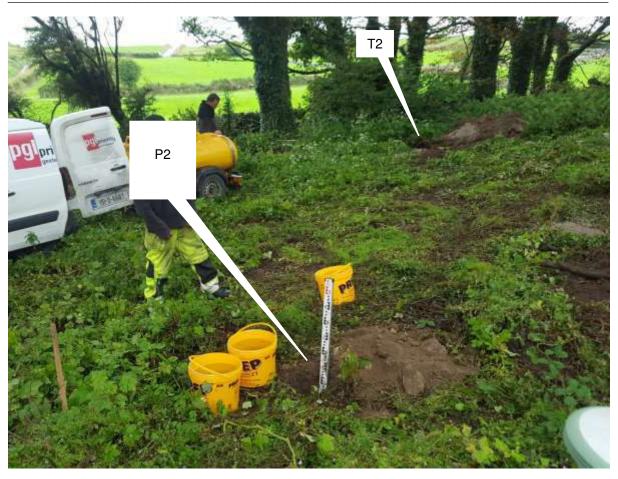

P2 dug to 400mm 02-07-2020



P2 dug to 400mm 02-07-2020

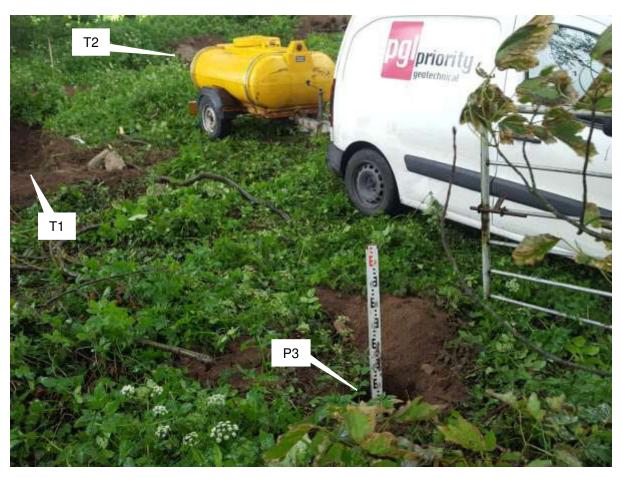

P3 Dug to 400mm 02-07-2020



P3 Dug to 400mm 02-07-2020



T1 dug to 400mm 02-07-2020



T1 dug to 400mm 02-07-2020



T2 dug to 400mm 02-07-2020



T2 dug to 400mm 02-07-2020



T3 dug to 400mm 02-07-2020




T3 dug to 400mm 02-07-2020


APPENDIX C

SITE SUITABILITY ASSESSMENT SUPPORTING DRAWINGS

- 6140-JOD-XX-ZZ-DR-B-2009 Site Identification Map.
 - 6140-JOD-XX-ZZ-DR-B-2010 Site Location Map.
- 6140-JOD-XX-ZZ-DR-B-2011 Existing Site Layout Plan
- 6140-JOD-XX-ZZ-DR-B-2012 Proposed Site Layout Plan

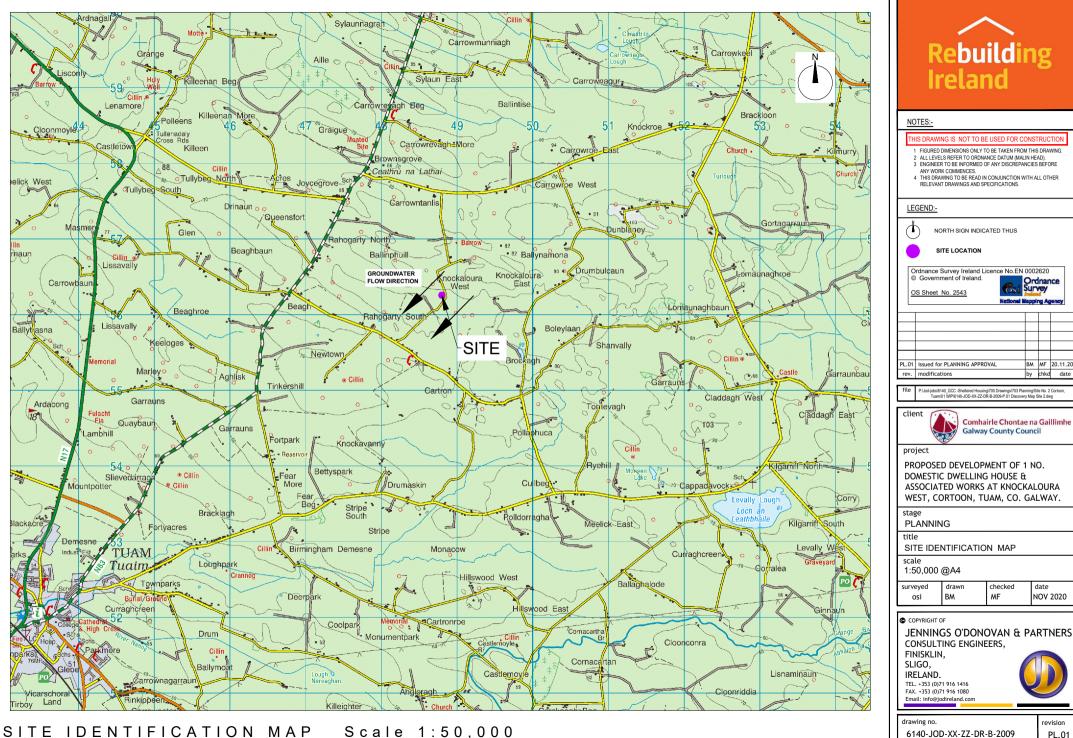

PL.01

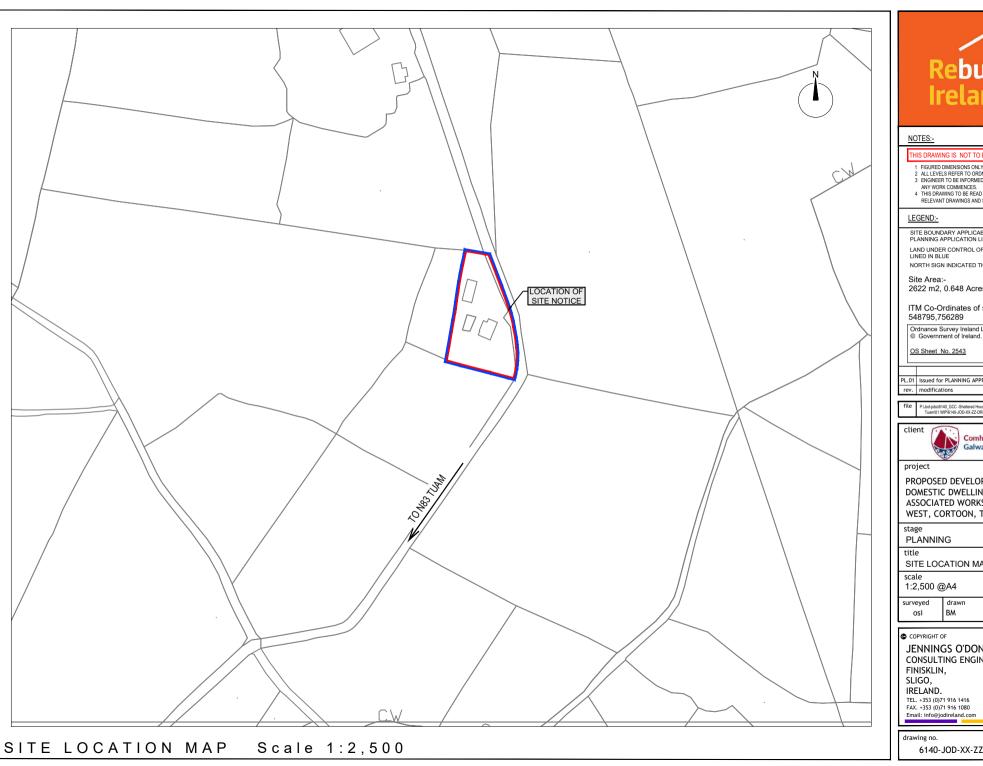



- FIGURED DIMENSIONS ONLY TO BE TAKEN FROM THIS DRAWING.
 ALL LEVELS REFER TO ORDNANCE DATUM (MALIN HEAD).
 ENGINEER TO BE INFORMED OF ANY DISCREPANCIES BEFORE ANY WORK COMMENCES.
- 4 THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWINGS AND SPECIFICATIONS.

SITE BOUNDARY APPLICABLE TO PLANNING APPLICATION LINED RED

LAND UNDER CONTROL OF APPLICANT LINED IN BLUE

NORTH SIGN INDICATED THUS

Site Area:-

2622 m2, 0.648 Acres, 0.262 Hectares

ITM Co-Ordinates of site:-548795.756289

Ordnance Survey Ireland Licence No.EN 0002620

Ordnance

PL.01 issued for PLANNING APPROVAL BM MF 20.11.20 rev. modifications

P:Uod-jobsl6140_GCC -Sheltered Housingl700 Drawingsl703 Planning(Site No. 2 Cortoon Tuami01 WIP/6140-JOD-XX-ZZ-DR-8-2010-P.01 Site Location Map Site 2 Final.dwg



Comhairle Chontae na Gaillimhe **Galway County Council**

PROPOSED DEVELOPMENT OF 1 NO. DOMESTIC DWELLING HOUSE & ASSOCIATED WORKS AT KNOCKALOURA WEST, CORTOON, TUAM, CO. GALWAY.

SITE LOCATION MAP

1:2,500 @A4

drawn

checked date NOV 20

JENNINGS O'DONOVAN & PARTNERS CONSULTING ENGINEERS,

SLIGO, IRELAND.


TEL. +353 (0)71 916 1416 FAX. +353 (0)71 916 1080 Email: info@jodireland.com



6140-JOD-XX-ZZ-DR-B-2010

revision PL.01



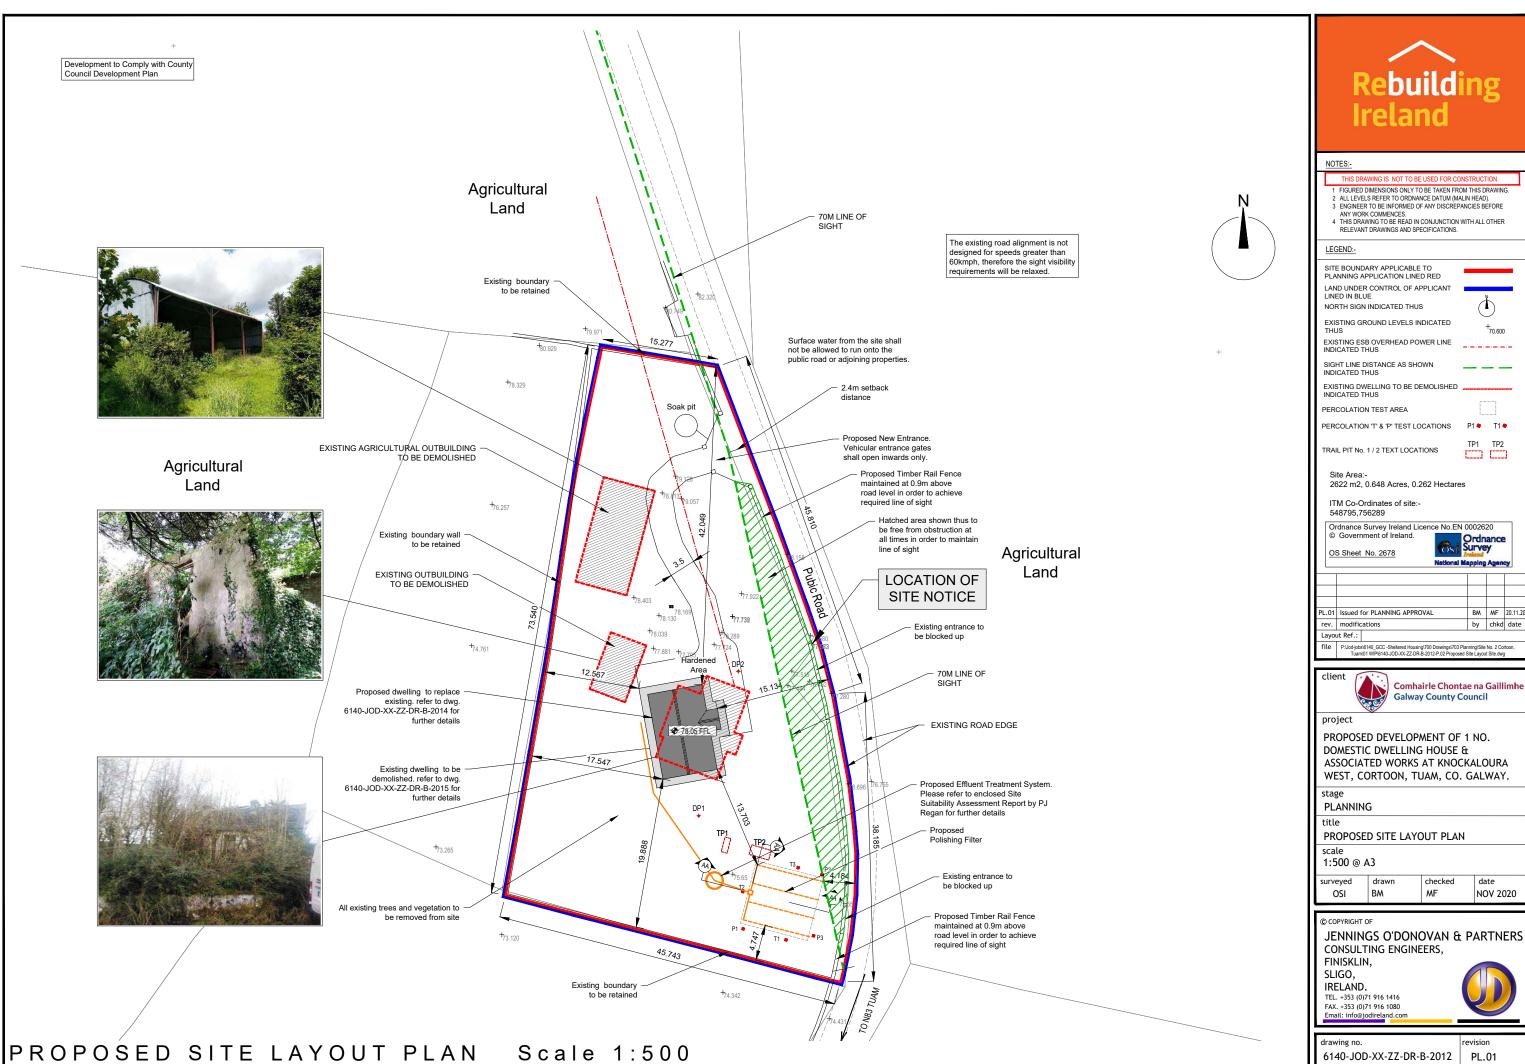




Ordnance Survey


Galway County Council

ASSOCIATED WORKS AT KNOCKALOURA WEST, CORTOON, TUAM, CO. GALWAY.

6140-JOD-XX-ZZ-DR-B-2012

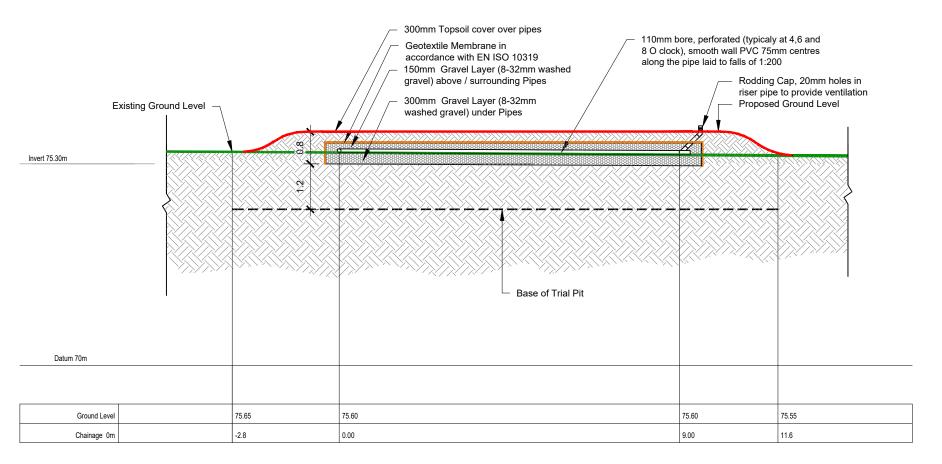

POLISHING FILTER LONGITUDINAL SECTION A-A THROUGH TRENCH Scale 1:100

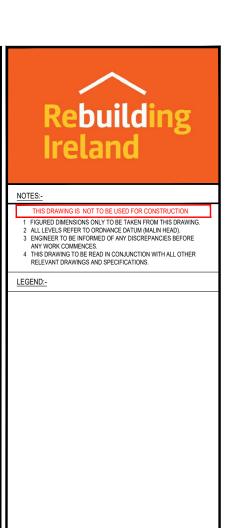



Comhairle Chontae na Gaillimh Galway County Council

project

PROPOSED DEVELOPMENT OF 1 NO. DOMESTIC DWELLING HOUSE & ASSOCIATED WORKS AT KNOCKALOURA WEST, CORTOON, TUAM, CO. GALWAY.

stage PLANNING

scale

title

POLISHING FILTER SECTION A-A

1:100 @ A3

surveyed drawn checked date
OSI BM MF NOV 2020

© COPYRIGHT OF

JENNINGS O'DONOVAN & PARTNERS CONSULTING ENGINEERS, FINISKLIN.

FINISKLIN, SLIGO, IRELAND.

IRELAND. TEL. +353 (0)71 916 1416 FAX. +353 (0)71 916 1080 Email: info@jodireland.coi

drawing no. revi

APPENDIX D

SUPPORTING DOCUMENTS RELATING TO PROPOSED EFFLUENT TREATMENT SYSTEM

Proposed Secondary Treatment System
- Solido SMART (6PE)

- Solido SMART (S.B.R.) Brochure
- Solido SMART (S.B.R.) PIA Certification



The new generation in

Decentralised Wastewater Treatment










The new generation in Decentralised Wastewater Treatment

The Solido SMART from Premier Tech, is a decentralised wastewater treatment plant and the perfect solution for residential and commercial projects where mains drainage is unavailable.

Serving a population of up to 9 PE and fast becoming the industry's system of choice; this low-profile unit offers a reliable design and low installation costs. Available in gravity and integrated pumped outlet versions. Installed to treat wastewater with minimal impact on the environment, typical applications include single dwellings, small communities.

Superior Technical Performance

The highly successful Solido SMART is designed and tested in accordance with EN12566-3, in compliance with S.R 66:2015. This plant is able to produce a final effluent quality better than 10:20:5 (BOD:SS:NH3). Removal of total nitrogen and total phosphorus (TN and TP) is expected to reach 83% and 68% respectively.

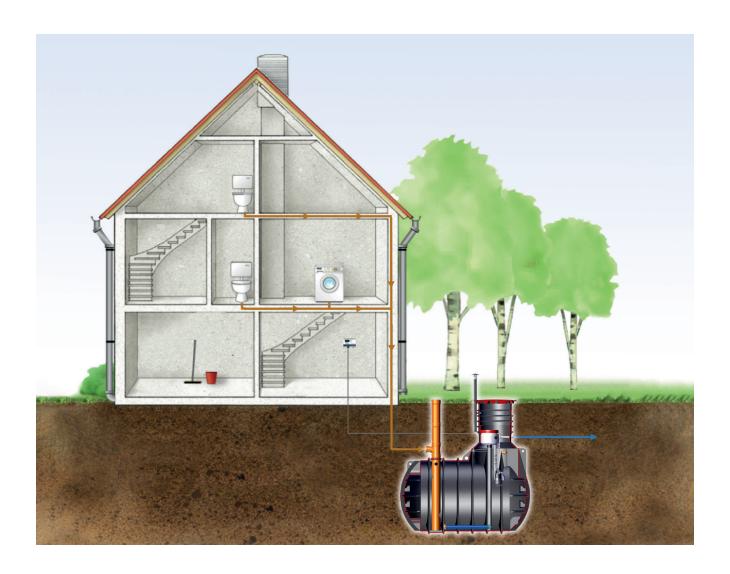

Solido SMART

State of the art SBR Treatment

Advanced Technical Qualities

The Solido SMART solution makes decentralised wastewater treatment easier and more efficient than ever. Trust its high-quality design and durable components to provide long-term performances and peace of mind.

- Low operational cost, offering long term savings.
- Discrete and silent treatment plant.
- Reduced installation and maintenance costs,
 Solido SMART tanks are lightweight, compact and have low installation depth requirements.
- Fully CE marked. Designed and tested in accordance with EN 12566-3.
- Polyethylene material durable, recyclable and impact resistant.



How it works

Solido SMART combines the benefits of an ultracompact solution with the trusted performance of Solido technology. Integrating with SBR technology comparable to large municipal applications, the proven technology operates with direct aeration of the wastewater and without the need for primary treatment. This simple principle provides efficient wastewater treatment results without the emission of any odours.

1. Technology Capsule

Safely housed in the capsule, the compressor requires only 0.80 - 1.04 kWh/d for 6 - 9 PE plants respectively - providing an efficient and quiet treatment without disturbance to the homeowner.

2. Tube Diffuser

The incoming wastewater is immediately supplied with oxygen to ensure a very efficient and odourless treatment.

3. The SMART Pipe

Slows down the incoming influent and simplifies inspections. Makes part desludging safe and easy.


4. Clearwater Pump (Pumped outlet only)

5. Clearwater Air Lift (Gravity outlet only) The patented self-flushing airlift

prevents sludge loss and ensures high performances.


6. Solido-Tank

Manufactured seamlessly as one-piece from eco-friendly PE, with 25 years warranty.

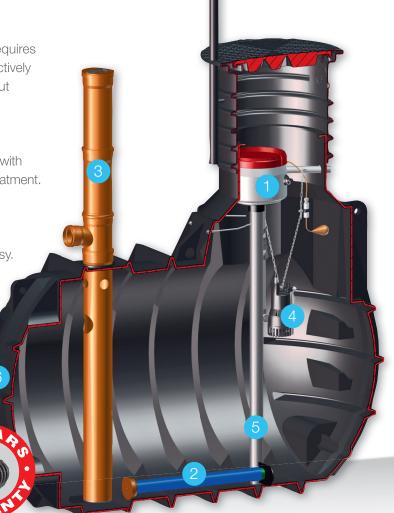

Solido SMART Plant Size

Plant Size (PE)	discharge	Tank Type	Length (m)	Width (m)	Height (m)	INLET Height to base (m)	OUTLET Height to base (m)	Pipe Diameter (mm)	reference code
6 (max. 0.9 m³/d)	pumped	3000	2.42	1.42	2.06 – 2.47	1.47	1.73	110	KEBL3026
9 (max. 1.35 m³/d)	pumped	4500	2.42	1.79	2.34 – 2.75	1.74	2.06	110	KEBL4526
6 (max. 0.9 m³/d)	gravity	3000	2.42	1.42	2.06 – 2.47	1.47	1.40	110	KCBL3020
9 (max. 1.35 m³/d)	gravity	4500	2.42	1.79	2.34 – 2.75	1.74	1.73	110	KCBL4520

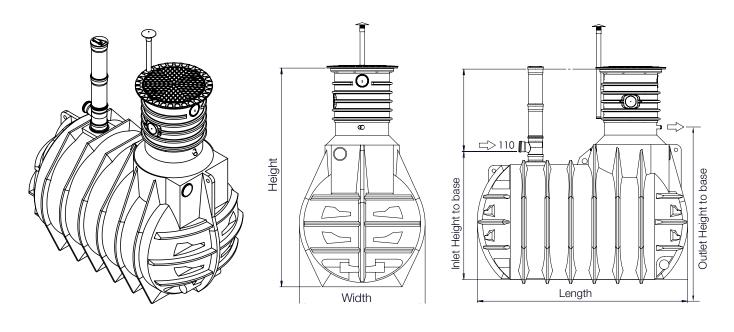

Installation

The Solido SMART Sewage Treatment Plant requires a relatively low cost and easy installation process. As the tank is super reinforced, concrete is not needed and the tank can be fully installed in free flowing granular backfill.


Warranty


All Premier Tech PE tanks come with a 25 year warranty as standard. Individual product and part warranties are available upon request.

Premier Tech work closely with a nationwide network of installation partners and detailed installation guidelines are provided with each product.

All electric work should be carried out in accordance with current regulations.



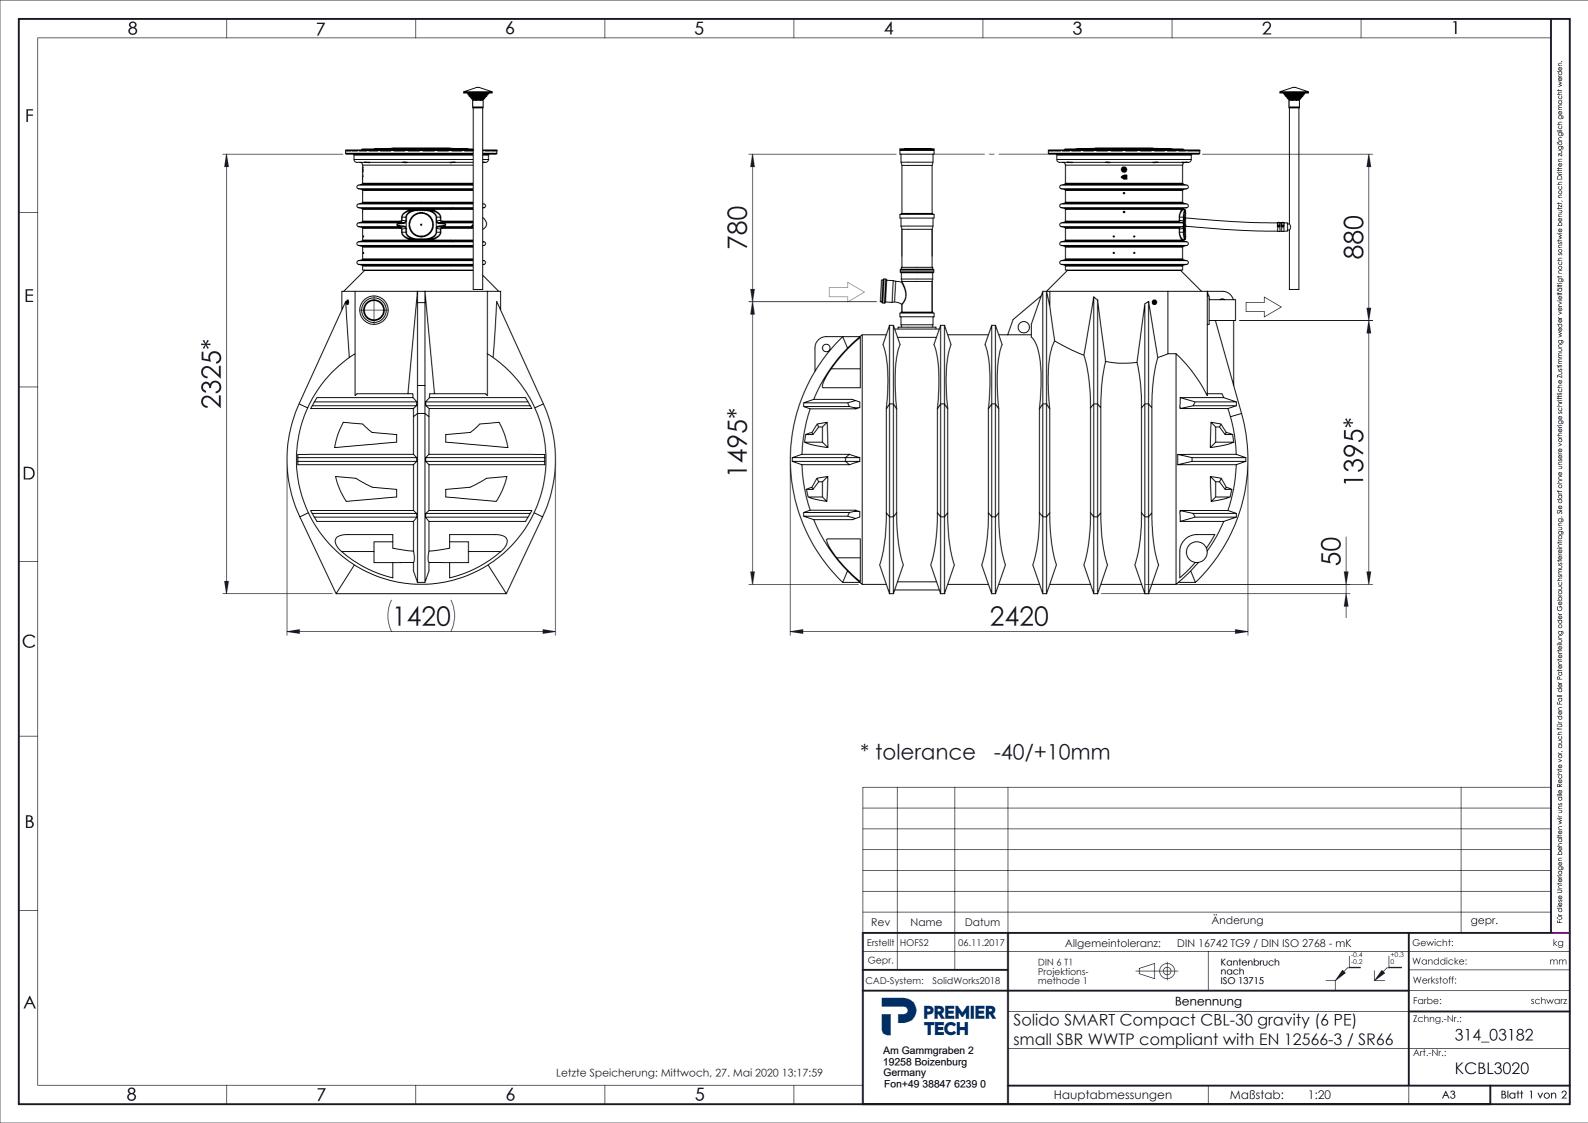

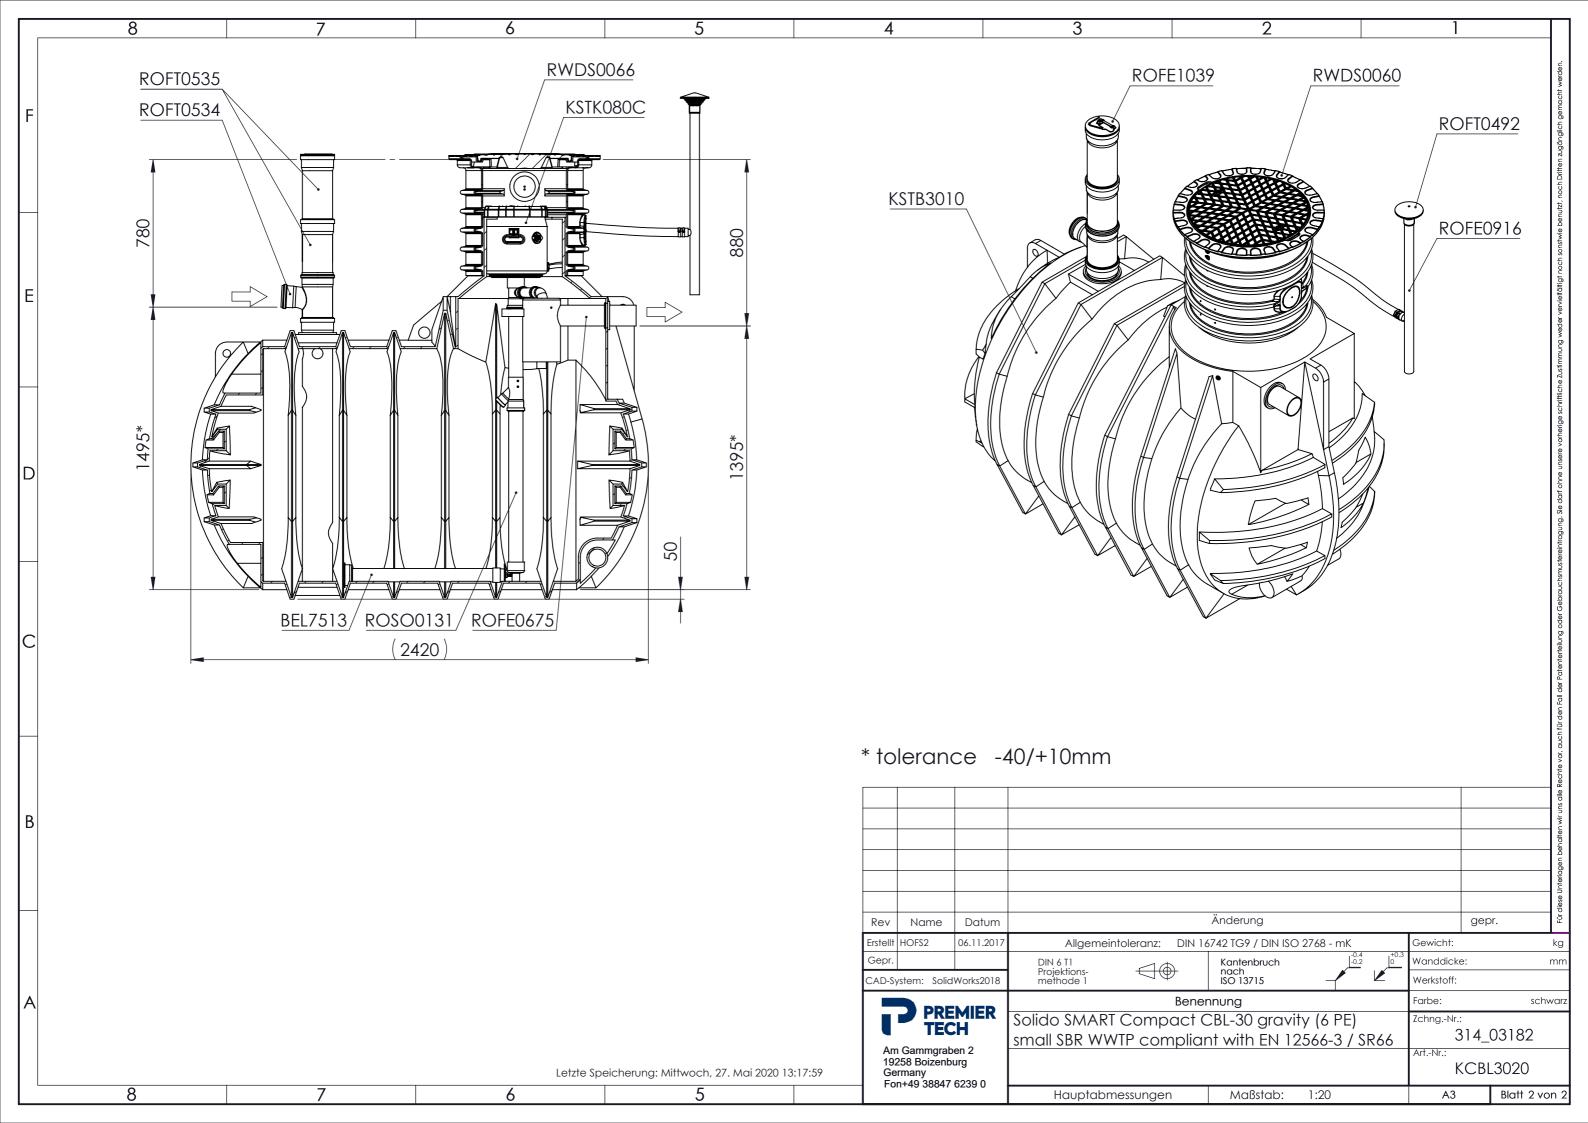



Certificate TREATMENT PERFORMANCE RESULTS

Premier Tech Aqua GmbH
Bei der neuen Münze 11, 22145 Hamburg, Germany

EN 12566-3

Results corresponding to EN 12566-3 and S.R. 66

PIA-SR66-1604-1055.02

SOLIDO smart

One-chamber SBR system in one PE tank

Nominal organic daily load 0.30 kg/d Nominal hydraulic daily load 0.90 m³/d

Material Polyethylene

Watertightness Pass

Structural behaviour (Pit Test) Pass (also wet conditions)

Durability Pass

 Treatment efficiency
 Efficiency
 Effluent

 (nominal sequences)
 COD
 95.1 %
 39 mg/l

 BOD5
 98.5 %
 5 mg/l

 NH4-N
 98.0 %
 0.7 mg/l

 SS
 97.1 %
 13 mg/l

Number of desludging Not more than once Electrical consumption 0.81 kWh/d

Performance tested by:

PIA – Prüfinstitut für Abwassertechnik GmbH

Hergenrather Weg 30 52074 Aachen Germany

This document replaces neither the declaration of performance nor the CE marking.







Over Virally Certification of Viral Virally Control Virally Co

Verschitz / Wermter September 2019

SOLIDO smart range and its referring test reports:

Population equivalent (PE)	Drawing of model of the range	Watertightness (EN 12566-3 Annex A)	Treatment Efficiency (EN 12566- 3 Annex B)	Structural Behaviour (EN 12566- 3 Annex C)	Durability
Initial Type Test (ITT) 6 900 I/d		Pass PIA2007-WD- 003	Pass PIA2015- 239B22.e	Pass For wet ground conditions also, 0.95 m installation depth from inlet invert	Pass PIA2016- DH-1510- 1052.01
6 900 l/d	THE REPORT OF THE PARTY OF THE	Pass PIA2007-WD-003	Pass Range conformity according to S.R. 66:2015	Pass For wet ground conditions, For wet ground conditions also, 1.00 m installation depth from inlet invert	Pass PIA2016- DH-1510- 1052.01
7 1050 l/d	ACT STATE OF THE PROPERTY OF T	Pass PIA2007-WD- 003	Pass Range conformity according to S.R. 66:2015	Pass For wet ground conditions, For wet ground conditions also, 1.00 m installation depth from inlet invert	Pass PIA2016- DH-1510- 1052.01



Population equivalent (PE)	Drawing of model of the range	Watertightness (EN 12566-3 Annex A)	Treatment Efficiency (EN 12566- 3 Annex B)	Structural Behaviour (EN 12566- 3 Annex C)	Durability
9 1350 l/d		Pass PIA2007-WD- 003	Pass Range conformity according to S.R. 66:2015	Pass For wet ground conditions also, 0.95 m installation depth from inlet invert	Pass PIA2016- DH-1510- 1052.01
10 1500 I/d		Pass PIA2007-WD- 003	Pass Range conformity according to S.R. 66:2015	Pass PIA2006-BT-004 PIA2011-ST-PIT-1105-1032 For wet ground conditions also, 1.00 m installation depth from inlet invert	Pass PIA2016- DH-1510- 1052.01
12 1800 l/d		Pass PIA2007-WD- 003	Pass Range conformity according to S.R. 66:2015	Pass For wet ground conditions also, 0.95 m installation depth from inlet invert	Pass PIA2016- DH-1510- 1052.01



Population equivalent (PE)	Drawing of model of the range	Watertightness (EN 12566-3 Annex A)	Treatment Efficiency (EN 12566- 3 Annex B)	Structural Behaviour (EN 12566- 3 Annex C)	Durability
18 2700 l/d		Pass PIA2007-WD- 003	Range conformity according to S.R. 66:2015	Pass For wet ground conditions also, 0.95 m installation depth from inlet invert	PIA2016- DH-1510- 1052.01 pass
25 3750 l/d		Pass PIA2007-WD- 003	Range conformity according to S.R. 66:2015	PIA2015- ST-PIT- 1406- 1043.01 Pass For wet ground conditions also, 0.95 m installation depth from inlet invert	PIA2016- DH-1510- 1052.01 pass
40 6,000 l/d	The state of the s	Pass PIA2007-WD- 003	Range conformity according to S.R. 66:2015	Pass For wet ground conditions also, 0.95 m installation depth from inlet invert	PIA2016- DH-1510- 1052.01 pass



Population equivalent (PE)	Drawing of model of the range	Watertightness (EN 12566-3 Annex A)	Treatment Efficiency (EN 12566- 3 Annex B)	Structural Behaviour (EN 12566- 3 Annex C)	Durability
50 7,500 l/d		Pass PIA2007-WD- 003	Range conformity according to S.R. 66:2015	Pass For wet ground conditions also, 0.95 m installation depth from inlet invert	PIA2016- DH-1510- 1052.01 pass



